

Omni BR Cryo

COOLING UNIT



*Protect heat sensitive samples
during homogenization*



Omni BR Cryo

The **BR Cryo Cooling Unit** is compatible with the Bead Ruptor 24 Elite and is designed to prevent the increase of sample temperature during the homogenization process. Friction generated through the bead milling process generates heat that is imparted to the sample. In order to maintain a constant processing temperature during homogenization, the BR Cryo passes chilled air (-100°C to -50°C) into the sample processing chamber and across the sample tubes to dissipate heat.



ORDER NO. 19-8005


Specifications

Dimensions: 29.2 (high) x 34.3 (deep at base) / 20.3 (deep at top) x 22.9 wide cm

Weight: 7.26 kg (16 lbs)

Cryo Chamber Volume: 1 Liter (1.056 quarts)

Warranty: One Year

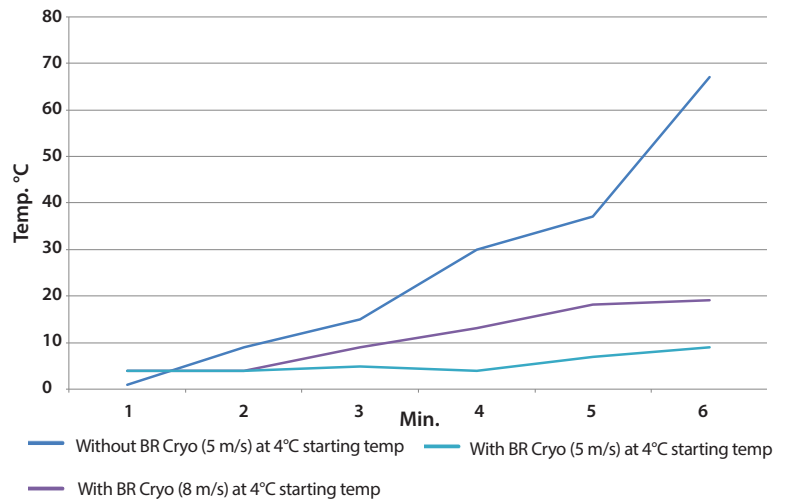

Operating Requirements

Optimal Pressure of Compressed Air Source: 55 - 100 PSI

Clean & Dry Compressed Air: Purity 99.99%, water < 5 ppm

Liquid Nitrogen Required Per Run: 1 Liter max

Liquid Nitrogen Consumption: About 1 liter per 5 min. of homogenization time

Dry Ice/Alcohol Mixture Required: 0.5 L (16 oz.) of ethanol + 0.5 L (16 oz.) of dry ice

Dry Ice Consumption: 1 Liter of mixture per 90 min. of homogenization time

(주) 바이오디

(우.14322) 경기도 광명시 하안로 60 광명SK테크노파크 A동 1102호
T_02.6264.3399 F_02.6264.3400 E_order@bio-d.co.kr

-P 검색창 “바이오디” 검색
www.bio-d.co.kr

bio  *Bio Design*